






Towel Rail Installation

- . review instructions carefully before installation
- . installation should be completed by a suitably qualified person
- . please dispose of packaging in a responsible manner

tools required




parts required

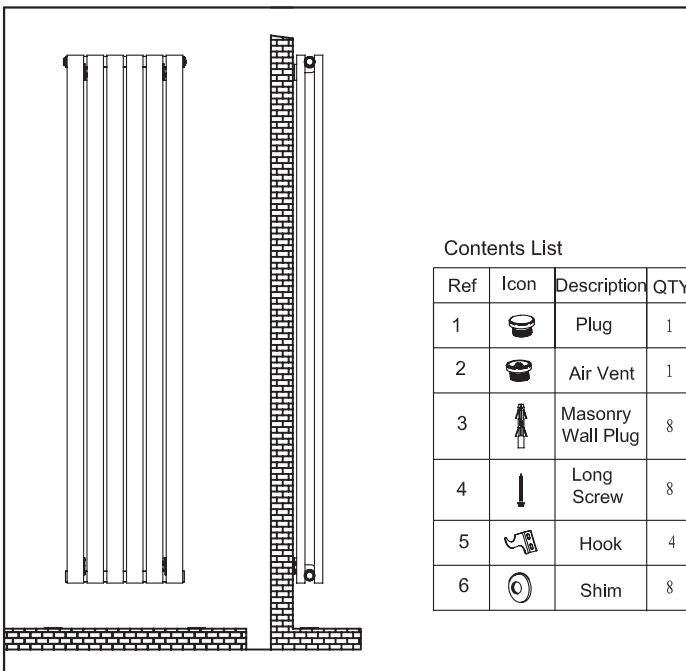

A




1. Install 1 (plug) and 2 (air vent) in the right position. (figure I)

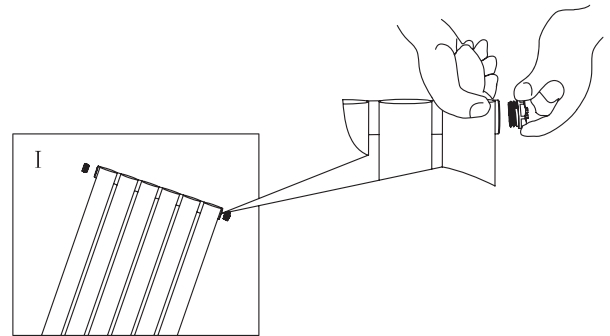

ATTENTION: To avoid accident, PLS fasten the thread exactly.




B

1. Choose an appropriate position and mark the fixing points with a pencil.



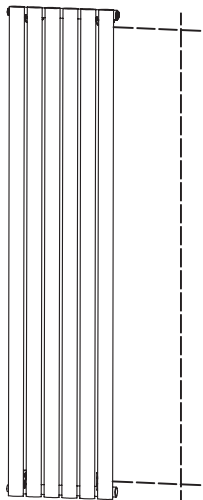


C

1. Drill a hole on the marked place by $\varnothing 8\text{mm}$ electric drill. (Figure I)
2. Insert 3 (Wall Plug) into the $\varnothing 8\text{mm}$ hole. (Figure II)
3. Place 4 (Long Screw) through 6 (Shim) and 5 (Hook), tighten it into the 3 (Wall plug). (Figure III)



ATTENTION: Do not fix the bottom hooks completely because the position of towel warmer will be adjusted while installing.

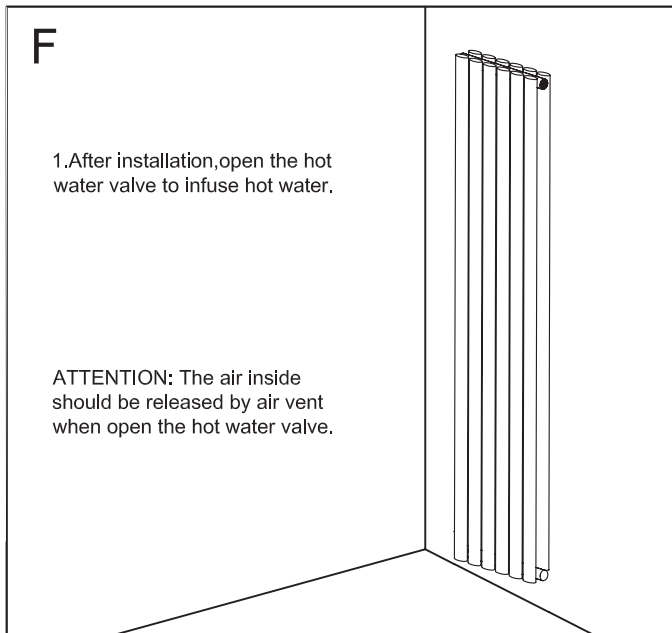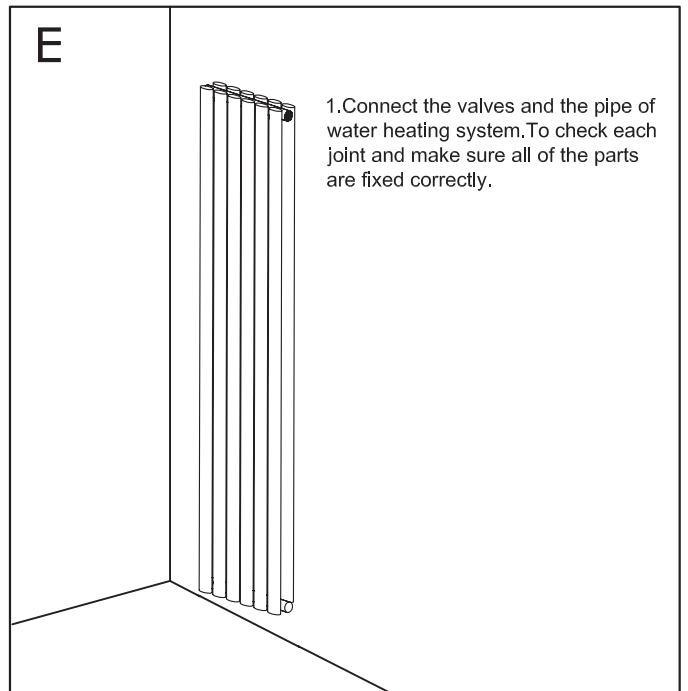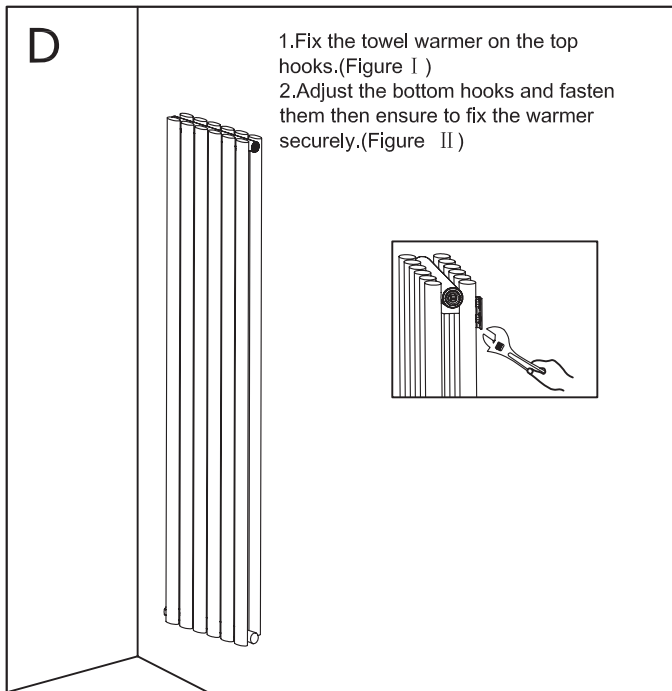

After installation . . .

- Use a screwdriver to open the air vent, open the valve and let the water rush into the towel warmer. Check all connections for leaks.
- Once water overflows from the air vent, there is no air in the tube.
- Use a screwdriver to close the air vent, turn on the valve and the towel warmer is ready for use.

After care . . .

- Classic towel warmers are made from steel with chrome plating, and should not be cleaned with corrosive or scouring cleaning agents.

Please note . . .

- This product can only be used at PN ≤ 1MPa (10g/cm², 10 Bar), It should only be filled with water, and at a temperature below 100 °C (212 °F). See table below for installation requirements.
- If the temperature exceeds 48 °C (or 120 °F), please show a warning sign near the product to avoid burning and scolding accidents.

Fill ^{3/4} Full	Pressure	Temperature	Comments
water only	PN ≤ 1Mpa	0° C < t ≤ 100 °C	If ambient temperature drops below 1°C, drain out the water to prevent freezing.